



APPLE DENTAL

Catalogue-2021-22





The Global Leader in
Dental Equipments
Sole Agent For India



Estd. Since 1982

Making millions smile....

Making millions smile....

Pyrax Group is a well known name in the dental industry. PYRAX Group was founded in 1982, in Roorkee, Uttarakhand (India) . PYRAX is a Dental Products Manufacturing company which started its journey as a start-up venture by two founders brothers MR. Bharat Bhushan Gupta (B.E Chemicals, IIT Roorkee) & Late Mr. Deepak Kumar Gupta (L.L.B, C.C.S.U. Meerut) The venture started as research project for basic chemicals used in Laboratory & clinical Research.

We also have considerable presence in more then 20 countries Pyrax serves dental students & Dental students & Dental technicians across India through a strong dealer network in all states and cities and also exports its products & connects with dental professionals with Russia , Syria Egypt , Vietnam, Kenya , Nepal , Myanmar, Belgium, Iran, South Africa, Afghanistan, Istanbul, Palestine, Azerbaijan, Bahrain, Saudi Arabia, Jordan, Malaysia, Nigeria, Mozambique, Turkey, Mali, Bahrain, and many more countries ...



Super Torque Push Button (Model-A1 TU)

Appledental High Speed Air Rotor Super Torque Push Button Hand Piece is appreciated by the customers for High Torque, comfort and very easy operation due to its highly elegant Peacock Neck design.

It is well known for its longevity and easy operations and for best quality Copper Material Body, High Quality German Bearing Cartridge, Low Noise, Low Vibration With 4-Anti-Retraction Hole, Stylish Good Quality Cartridge with Anti-retraction function.

Four holes on the head is to protect the leakage of water when the dental units stops work.,the dirty things can come out under the air pressure of inertance through 4 holes.

Autoclavable upto 135° C

Head Size : Torque Head.

Fitting : Two Holes / Normal Fitting.

Water Spray : Double

Wrench Type : Push Button

Bur Size : 1.59 mm - 1.60 mm.

Air Pressure : 0.18-0.21MPa.

Speed : 350000-400000rpm.

Warranty: 6 Months



Super Torque Push Button with LED (Model-A2 TUP)

Appledental High Speed Air Rotor Super Torque Push Button LED Hand Piece is appreciated by the customers for High Torque with LED Light , comfort and very easy operation due to its highly elegant Pecock Neck design. It is well known Brand for its longevity and easy operations.

Best Quality Copper Material Body, High Quality German Bearing Cartridge with dust cover, Low Noise, Low Vibration With 3 - water spray Hole.

SMD LED Technology Never ever off-light and can bear 135°C degree sterilization.

Handpiece can be autoclaved for more than 1200 times with LED Gaurantee>1000 hours.

Head Size : Torque Head.

Head Diameter: 12.5mm

Fitting : Two Holes / Normal Fitting.

Water Spray : Triple

Water Flow : 60 ml/min - 90 ml/min

Wrench Type : Push Button

Bur Size : 1.59 mm - 1.60 mm.

Noise : < 65 dB

Air Pressure : 0.18-0.21MPa.

Speed : 350000-400000rpm.

Brightness : 16,000 Lux- 20,000 Lux

Warranty: 6 Months



Standard Push Button-SU

Appledental High Speed Standard Head Push Button Air Rotor Hand Piece is appreciated by the customers for balanced Torque, comfort and very easy operation due to its highly elegant design. It is well known Product for its longevity and easy operations, German Make Ceramic Ball Bearing. Low Noise and Low Vibration.

Three holes on the head is to protect the leakage of water when the dental units stops work.,the dirty things can come out under the air pressure of inertance through 3 holes.

Autoclavable upto 135° C

Head Size : Standard Head.

Fitting : Two Holes / Normal Fitting.

Water Spray : Double

Wrench Type : Push Button

Bur Size : 1.59 mm - 1.60 mm.

Air Pressure : 0.18-0.21MPa.

Speed : 350000-400000rpm.

Warranty: 6 Months



Contra Angle

Appledental Contra Handpiece is a E-type low speed handpiece with wrench Type . It is designed to facilitate more user-comfortability for the professional and a significant reduction in procedural times for their patients. With the innovative technique, those hard to reach and hard to see places are more easily accessible, thus streamlining and shortening procedures, making it possible to achieve results with greater accuracy and precision.

Specifications: Fastening of the instruments with a turning latch. For any Air Motor or E-type motors(Micro Motor). The shank of the instrument mounted therein is 2.35 mm Fastening of the instruments with a turning latch

Autoclavable: Upto 135°C.

Speed: 22,000-27,000 rpm.

Bur Size: 2.335mm -2.355mm

Made up of a High Quality Aluminum body.

Suitable for any E-type headpiece(Air Motor/Micro Motor) accords with ISO standard. Suitable for both steam and chemical autoclave.

Warranty: 6 Months



Straight Hand Piece

Appledental Straight Handpiece is a low speed dental handpiece used in dental procedures. The straight handpiece by appledental is an E Type Low speed handpiece. The handpiece offers a low noise level which is lesser than 70dB.

Intended for dental clinical treatment and prevention Suitable for any E-type headpiece accords with ISO standard Suitable for both steam and chemical autoclave.

Specifications: Fastening of the instruments with a turning latch. For any Air Motor or E-type motors(Micro Motor). The shank of the instrument mounted therein is 2.35 mm Fastening of the instruments with a turning latch

Autoclavable: 135°

RPM: 22000-27000 RPM

Weight: 50 gm

Bur Size: 2.334-2.335

Noise: Less Than 70dB

Made up of a High Quality Aluminum body.

Suitable for both steam and chemical autoclave.

Warranty: 6 Months



Air Motor

Appledental Air-Motor is a dental equipment which can be used in Dental clinics & minor surgical units in place of electric Micromotors. They are air driven motors as compared electric driven Micromotors.

Features :

Low speed hand piece with E-type air motor Forward and reverse operations 500 – 25,000 rpm

High torque with smooth start- up Compatible with any attachment .

Highly durable Excellent efficiency Robust construction Autoclavable at 135° C for 20 min.

1) Design Extra-light & Powerful.

2) Motion 360° rotation of the contra-angle handpiece on the motor.

3) Rust Free Corrosion Resistant.

5) External spray

6) Forward / reverse drive

7) Speed: up to 25.000 rpm*

Made up of a High Quality Aluminum body.

Suitable for both steam and chemical autoclave.

Warranty: 6 Months

RVG

ECO-SENSOR-II

Faster/ Recycle/ Durable/ Water Resistant

World's Most Affordable

Sensor

in Dental Fertility



CE certified

APPLEDENTAL ECO SENSOR-II

Advantages:

- Faster-Durable-Recycle
- High Resolution Images
- 3 seconds to get image
- Small, much better feelings for patients
- 5 years warranty
- IP68 Waterproof CHIP
- 5 mm thickness
- Multiuser Software

Features :-

- The whole imaging procedures go directly from data acquisition to immediate image display and reading. There is NO need for any X-ray film. The sensor casing is purposely designed to resist shocks, bite, and drops to ensure product durability. It is absolutely waterproof, able to be plate reader. Immersed in disinfecting solutions for better hygienic and safety protection. The protective sheaths reduce the risk of cross-contamination and protect plates from scratches and heat.
- Extraordinary Usability
- The computer supports Lightning fast data transmission and enables real-time imaging. User-friendly design also compatible with the currently available imaging technology in the market, the sensor can work with both film and digital radiography viz helps to optimize workflow.
- Photon Counting Detector Technology
- The Eco sensor detector is totally digital, without a need for film processing. Moreover, our photon- counting detector is applied in intraoral imaging for the first time, converting X-rays into digital signals directly and with standard microelectronics fabrication process, thus enjoying sizeable cost advantage, Yielding high dynamic range, high contrast-resolution images at comparatively lower dosage.
- Powerful Post-Processing Software.
- Wide dynamic range and high contrast resolution work together to make unparalleled clarity for both the tooth and subtle details. Multiple image processing algorithms help to improve image contrast and sharpness with more exquisite details of the soft tissues.
- Excellent image quality, direct imaging technology, easy to obtain high resolution imaging.
- Perfect user experience, multi-terminal supporting software.



Technical Specifications	
Theoretical Resolution	25lp/mm
Real Resolution	20lp/mm
Image Pixel	1400X1800
Size	31.4*38.4*5.0
Warranty	5 Years



Strong cable connection-passed
60,000+ Bending testing



The thinner Eco-sensor
5mm

APPLEDENTAL ECO ENDO MOTOR

FEATURES:

- Cordless endo motor, compact, flexible and easy to operate.
- LCD display with LED backlight, easy to discern at any angle.
- Four kinds of gear ratio are selectable. Rotation speed and torque are both adjustable.
- Program memory function: it can store 9 kinds of commonly used gear ratio, rotation speed and torque according to different clinical needs.
- 4 working modes: Forward Mode, Auto Reverse Mode, Auto Stop Mode, Auto Reciprocating Mode.
- 1:1, 10:1, 16:1, 20:1 mini contra angles are compatible. Standard configuration is 16:1.

TECHNICAL SPECIFICATIONS:

- Input Power Supply: AC100-240V, 50/60HZ
- Output Voltage: DC 5V/Micro USB
- Output Current: 1A
- Battery: Rechargeable Li-ion Battery, DC3.7V/950mAh
- Contra Angle: 16:1
- Speed 140-550 Rpm
- Torque 0.3- 4.0 Ncm
- Charging Time: 3 Hr Approx
- Autoclave Time: 20 min at 121°C or 15 min at 132°C (Only Handpiece)
- Working mode: 4
- Program: 9
- Warranty: 12 Months



Pre-set file settings, Built in more than 30+ mainstream file system, can be quickly switched



340 degree rotation for 16:1 contra angle, more convenient for complicated root canal problems



Ultra long battery life
1000mAh Large Capacity



Reciprocating motion
mode adjustable angle



CE certified

2 IN 1

Model: ECO ENDO

Appledental Smart Endo Pro 2 in 1 is a Very comfortable Cordless Original Japanese endo motor with brilliant and smart optimization with a 340-degree Adjustable Contra angle with customizable Reciprocating Angle with a built-in Apex Locator.

Integrated Length determination makes endodontic treatment Safer and more efficient. Realize real-time display of file location in canal. Automatically stops or reversely rotates as soon as the file reaches the apical stop, so as to prevent perforation. Auto Start and Auto Stop functions respectively enable the motor to automatically start while the file gets in the canal and stop when it is out.

INDICATION :

Cordless Endomotor used primarily for mechanical root canal preparation with an integrated apex locator for endodontic treatment.

While root canal treatment is done, the root canal measurement can be simultaneously carried out. Alternatively, the independent apex locator measurement is possible, using the separate file clamp for measuring files.

ADVANTAGES :

- Flawless Safety Functions.
- The autoreverse and auto-forward modes with automatic safety stop minimize the risk of file breakage.
- EndoPro has an ergonomic design which makes it fit for the dentist's use.
- The slim body and extremely small head allow optimal visibility during procedures.
- Hygiene and maintenance Free:
- The contra-angle head is sterilizable and Thermo disinfectable.
- Handpiece drive and charging station can be disinfected through wiping down, and can be cleaned with a soft cloth with ethanol.
- Cordless system makes it user friendly.



Technical Specifications:

- Gear ratio: 1:1
- Host voltage: 3.7V
- Input Voltage: ~ Ac100- 240V, 50Hz/ 60Hz
- Output voltage: 0.4A Max
- Output current: DC 5V/ 1A
- Battery capacity: 1500mAh
- Torque range: 0.5 Ncm- 4.0 Ncm (5mNm-40mNm)
- Speed range: 120rpm -1000rpm
- File Retention: Push Button
- Weight 160gm



Screen Direction can be changed
Suitable for LEFT/RIGHT
hand operation



Pre-set file settings, Built in
more than 30+ mainstream
file system, can be quickly switched



340 degree rotation for
1:1 contra angle, more convenient
for complicated root canal problems



Ultra long battery life
1000mAh Large Capacity



Reciprocating motion
mode adjustable angle

Appledental Ultrasonic Scaler

Product Details :- Appledental Dental Ultrasonic Scaler is a unique designed plastic ABS body Piezoelectric scaler. Ultrasonic scalers are used to remove calculus rapidly from the tooth surface. The scaling tip vibrates in the ultrasonic range of 20-45 kHz (i.e. 20,000 to 45,000 times per second), with an optimum frequency between 18 kHz and 32kHz.

Product specifications:-

- Compact unit housing for easy placement anywhere in the operatory
- Extremely gentle on patient, causes little or no sensitivity
- No heat build up in handpiece tip with extended use
- Autoclavable handpiece
- Extensive power range to allow widest choice of clinical applications
- Fine water spray eliminates excessive spray on tooth.
- Main unit input 24VAC 50 Hz 1.3 A
- 5 Tips: 📌 4 Tips for Scaling (2XG1, 1XG2, 1XG4,) and 1 Tip for Perio (1XP1)

Model	Frequency	Power Input	Water Pressure	Handpiece Type	Warranty
W1	30kHz \pm 3kHz	220-240VAC 50 Hz/ 110VAC 60Hz	0.1 bar- 5 bar (0.01MPa-0.5MPa)	Non Detachable Handle	1 Year
W3	28kHz \pm 3kHz	220-240VAC 50 Hz/ 110VAC 60Hz	0.1 bar- 5 bar (0.01MPa-0.5MPa)	Detachable Handle can be Sterilized	1 Year
W3⁺	28kHz \pm 3kHz	220-240VAC 50 Hz/ 110VAC 60Hz	0.1 bar- 5 bar (0.01MPa-0.5MPa)	LED Light with Clear Vision Detachable Handle can be Sterilized	1 Year

Ultrasonic Scaler



Intraoral Camera

INTRAORAL CAMERA



3 color options

Product Details :- The intraoral camera is an amazing diagnostic tool for viewing different angles in the mouth that we would not have been able to just a few years ago. The camera gives us the ability to view the entire mouth on a monitor so that we can get a closer look at any potential issues or problems that may arise. In addition, the patient will have the ability to see for themselves first hand the same images we are seeing.

Technical Specification:-

- 17 inch LCD display resolution 1280*1024
- 5 million pixel high-definition wired probe
- Photos automatically backup to U disk Optional Wi Fi version, which is image transmission function
- The panel type: TN. The interface type: VGA + USB .
- Proportion of the screen: 4:3 / 16:9.
- Stylish Metalic TFT Clamp With 360 Angle Rotation.
- The nominal contrast: 10000:1.
- Level of visual angle: 135 degrees
- The black and white response time: 2 ms

SONY CCD Large Aperture Camera

550W Px, the normal one around 500px.

6pcs LED lamp with soft fill light and more clear.



6 Reasons to Buy



550 Px
SONY CCD



Picture/Video



17 inch
1280X1024



6 LED Lamp



Anti-Jitter



1Picture/ 4 Picture

Air rotor high-speed bur used during dental procedures, usually to remove decay and shape tooth structure prior to the insertion of a filling or crown.

A dental bur may also be used in the cleaning and shaping of root canals during endodontic treatment, or to remove old or temporary fillings or crowns prior to the insertion of new or permanent restorations. Air rotor burs can rotate at up to 400,000 rpm. Dental bur come in a great variety of shapes designed for specific applications. They are often made of steel with a tungsten carbide coating, or of tungsten carbide entirely. The bur may also have a diamond coating. There are various shapes of burs that include round, inverted cone, straight fissure, tapered fissure, and pear-shaped burs.



Speed: 1,60,000 RPM

Speed: 3,00,000 RPM















































































































Speed: 4,50,000 RPM























































































Dental Diamond Burs

Rotator Specialist

Appledental Burs Mould Chart

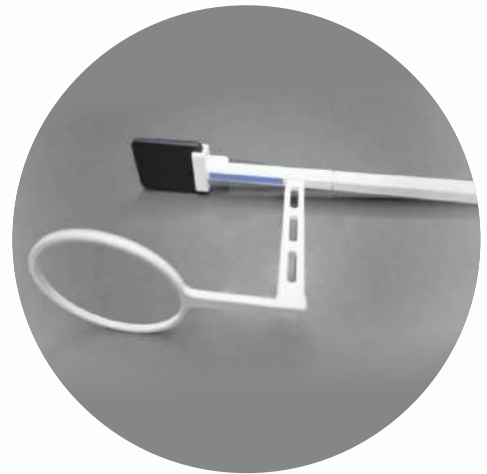
 ISO 173/014 TF-11	 ISO 173/016 TF-12	 ISO 173/018 TF-13	 ISO 172/023 TF-14	 ISO 173/019 TF-15	 ISO 173/017 TF-16	 ISO 173/018 TF-17	 ISO 172/012 TF-18	 ISO 172/013 TF-19	 ISO 171/014 TF-20	 ISO 171/016 TF-21
 ISO 170/021 TF-22	 ISO 170/018 TF-23	 ISO 198/012 TF-24	 ISO 170/016 TF-31	 ISO 169/011 TF-41	 ISO 170/012 TF-42	 ISO 170/014 TF-43	 ISO 199/016 TR-11	 ISO 199/016 TR-12	 ISO 198/018 TR-13	 ISO 198/022 TR-14
 ISO 200/022 TR-15	 ISO 198/018 TR-16	 ISO 200/024 TR-19	 ISO 197/014 TR-20	 ISO 197/016 TR-21	 ISO 198/011 TR-22	 ISO 198/012 TR-23	 ISO 197/018 TR-24	 ISO 199/016 TR-25	 ISO 199/018 TR-26	 ISO 198/013 TR-27
 ISO 198/014 TR-29	 ISO 299/016 MS-13	 ISO 299/019 MS-14	 ISO 166/011 TC-10	 ISO 160/016 TC-11	 ISO 166/011 TC-20	 ISO 160/014 TC-21	 ISO 160/012 TC-26	 ISO 299/012 FO-11	 ISO 250/014 FO-12	 ISO 250/017 FO-13
 ISO 251/023 FO-14	 ISO 249/011 FO-15	 ISO 249/013 FO-16	 ISO 298/014 FO-21	 ISO 298/016 FO-22	 ISO 249/016 FO-23	 ISO 257/028 FO-25	 ISO 257/032 FO-27	 ISO 257/019 FO-29	 ISO 257/018 FO-30	 ISO 257/018 FO-32
 ISO 540/009 FO-38	 ISO 111/012 SF-11	 ISO 111/014 SF-12	 ISO 111/016 SF-13	 ISO 110/014 SF-21	 ISO 111/012 SF-22	 ISO 109/013 SF-31	 ISO 107/008 SF-32	 ISO 109/010 SF-41	 ISO 131/014 SO-15	 ISO 288/012 SO-20
 ISO 289/014 SO-21	 ISO 130/012 SO-24	 ISO 141/010 SR-10	 ISO 141/012 SR-11	 ISO 141/014 SR-12	 ISO 141/016 SR-13	 ISO 140/012 SR-18	 ISO 140/014 SR-19	 ISO 553/019 RS-11	 ISO 545/018 RS-21	 ISO 544/018 RS-31
 ISO 039/032 EX-11	 ISO 039/035 EX-12	 ISO 237/018 EX-20	 ISO 237/012 EX-21	 ISO 002/018 EX-23	 ISO 220/017 EX-24	 ISO 237/032 EX-26	 ISO 655/016 EX-27	 ISO 655/018 EX-28	 ISO 655/021 EX-29	 ISO 234/014 EX-31
 ISO 237/010 EX-41	 ISO 001/023 BR-30	 ISO 001/018 BR-31	 ISO 001/016 BR-40	 ISO 001/014 BR-41	 ISO 001/010 BR-45	 ISO 001/012 BR-46	 ISO 001/008 BR-49	 ISO 002/018 BC-31	 ISO 002/014 BC-42	 ISO 002/012 BC-43
 ISO 002/010 BC-44	 ISO 002/012 BC-45	 ISO 019/010 DI-40	 ISO 019/010 DI-41	 ISO 019/014 DI-42	 ISO 010/010 SI-45	 ISO 010/012 SI-46	 ISO 010/014 SI-47	 ISO 010/016 SI-48	 ISO 010/023 SI-50	 ISO 068/042 WR-11

 ISO 109/010 SF-41C	 ISO 039/032 EX-11C	 ISO 038/043 EX-14C	 ISO 234/021 EX-25C	 ISO 237/032 EX-26C	 ISO 001/023 BR-30C	 ISO 001/018 BR-31C	 ISO 010/014 SI-47C	 ISO 010/016 SI-48C	 ISO 010/023 SI-50C	 ISO 068/040 WR-12C
 ISO 068/042 WR-13C	 ISO 903/043 WR-19C	 ISO 198/010 CF-11C	 ISO 198/014 CF-13C	 ISO 298/015 CF-14C	 ISO 141/012 SR-11C	 ISO 141/014 SR-12C	 ISO 141/016 SR-13C	 ISO 141/018 SR-14C	 ISO 140/012 SR-18C	 ISO 140/014 SR-19C
 ISO 298/016 CF-17C	 ISO 198/011 CF-21C	 ISO 299/017 CF-22C	 ISO 298/018 CF-28C	 ISO 298/019 CF-31C	 ISO 198/022 TR-S14C	 ISO 160/014 TC-S21C	 ISO 173/016 TF-12F	 ISO 171/016 TF-21F	 ISO 199/016 TR-11F	 ISO 198/018 TR-13F
 ISO 197/016 TR-21F	 ISO 199/016 TR-25F	 ISO 199/018 TR-26F	 ISO 160/016 TC-11F	 ISO 160/014 TC-21F	 ISO 298/014 FO-21F	 ISO 298/016 FO-22F	 ISO 257/018 FO-30F	 ISO 150/010 EX-17F	 ISO 150/012 EX-18F	 ISO 237/012 EX-21F
 ISO 001/006 BR-48F	 ISO 304/016 WR-31F	 ISO 141/010 SR-10F	 ISO 141/012 SR-11F	 ISO 141/014 SR-12F	 ISO 141/016 SR-13F	 ISO 141/018 SR-14F	 ISO 140/012 SR-18F	 ISO 196/020 CR-11F	 ISO 196/015 CR-12F	 ISO 197/012 CR-21F
 ISO 289/013 CR-22F	 ISO 001/006 CD-50F	 ISO 138/007 CD-51F	 ISO 138/007 CD-52F	 ISO 161/007 CD-53F	 ISO 246/006 CD-54F	 ISO 254/009 CD-55F	 ISO 246/007 CD-56F	 ISO 247/007 CD-57F	 ISO 108/008 CD-58F	 ISO 171/013 CD-59F
 ISO 198/010 CF-11F	 ISO 198/014 CF-13F	 ISO 298/015 CF-14F	 ISO 298/016 CF-17F	 ISO 198/011 CF-21F	 ISO 299/017 CF-22F	 ISO 298/018 CF-28F	 ISO 298/019 CF-31F	 ISO 304/016 WR-S31F	 ISO 173/016 TF-12EF	 ISO 171/016 TF-21EF
 ISO 199/016 TR-11EF	 ISO 198/018 TR-13EF	 ISO 197/016 TR-21EF	 ISO 199/016 TR-25EF	 ISO 199/018 TR-26EF	 ISO 160/016 TC-11EF	 ISO 257/019 FO-29EF	 ISO 299/016 CF-22EF	 ISO 160/014 TC-21EF	 ISO 248/014 FO-20EF	 ISO 298/014 FO-21EF
 ISO 298/016 FO-22EF	 ISO 540/007 FO-38EF	 ISO 243/010 FO-40EF	 ISO 248/012 FO-41EF	 ISO 248/012 FO-42EF	 ISO 237/012 EX-21EF	 ISO 001/014 BR-40EF	 ISO 196/019 CR-11EF	 ISO 196/014 CR-12EF	 ISO 141/012 SR-11EF	 ISO 141/014 SR-12EF

 ISO 068/040 WR-12	 ISO 068/042 WR-13	 ISO 068/042 WR-18	 ISO 903/043 WR-19	 ISO 198/010 CF-11	 ISO 198/013 CF-12	 ISO 198/014 CF-13	 ISO 298/015 CF-14	 ISO 298/017 CF-15	 ISO 298/016 CF-17	 ISO 198/019 CF-18
 ISO 198/011 CF-21	 ISO 299/017 CF-22	 ISO 297/015 CF-25	 ISO 299/017 CF-26	 ISO 298/018 CF-28	 ISO 298/019 CF-31	 ISO 299/021 CF-32	 ISO 173/014 TF-S11	 ISO 173/016 TF-S12	 ISO 173/018 TF-S13	 ISO 172/012 TF-S18
 ISO 172/013 TF-S19	 ISO 171/014 TF-S20	 ISO 171/016 TF-S21	 ISO 170/021 TF-S22	 ISO 170/018 TF-S23	 ISO 172/010 TF-S24	 ISO 170/016 TF-S31	 ISO 169/011 TF-S41	 ISO 199/016 TR-S11	 ISO 199/016 TR-S12	 ISO 198/018 TR-S13
 ISO 197/016 TR-S21	 ISO 198/011 TR-S22	 ISO 198/012 TR-S23	 ISO 198/013 TR-S27	 ISO 198/014 TR-S29	 ISO 160/016 TC-S11	 ISO 166/011 TC-S20	 ISO 160/014 TC-S21	 ISO 249/011 FO-S15	 ISO 298/014 FO-S21	 ISO 111/012 SF-S11
 ISO 111/014 SF-S12	 ISO 107/014 SF-S31	 ISO 107/008 SF-S32	 ISO 109/010 SF-S41	 ISO 288/012 SO-S20	 ISO 237/018 EX-S20	 ISO 001/018 BR-S31	 ISO 001/014 BR-S41	 ISO 001/010 BR-S45	 ISO 001/012 BR-S46	 ISO 001/008 BR-S49
 ISO 002/010 BC-S44	 ISO 002/012 BC-S45	 ISO 002/014 BC-S42	 ISO 002/012 BC-S43	 ISO 019/010 DI-S40	 ISO 019/010 DI-S41	 ISO 019/014 DI-S42	 ISO 010/010 SI-S45	 ISO 010/012 SI-S46	 ISO 010/014 SI-S47	 ISO 010/016 SI-S48
 ISO 198/011 CF-S21	 ISO 197/015 CF-S25	 ISO 197/015 CF-S25S	 ISO 299/017 CF-S26	 ISO 298/018 CF-S28	 ISO 170/016 TF-SS31	 ISO 197/016 TR-SS21	 ISO 288/012 SO-SS20	 ISO 019/010 DI-SS41	 ISO 173/016 TF-L12	 ISO 172/023 TF-L14
 ISO 199/016 TR-L12	 ISO 198/022 TR-L14	 ISO 166/019 TC-L19	 ISO 001/018 BR-L31	 ISO 111/014 SF-L12	 ISO 198/018 CF-L19	 ISO 298/018 CF-L28	 ISO 298/019 CF-L31	 ISO 299/021 CF-L32	 ISO 173/014 TF-11C	 ISO 173/016 TF-12C
 ISO 173/018 TF-13C	 ISO 173/019 TF-15C	 ISO 173/017 TF-16C	 ISO 172/013 TF-19C	 ISO 170/016 TF-31C	 ISO 170/023 TF-45C	 ISO 199/016 TR-11C	 ISO 199/016 TR-12C	 ISO 198/018 TR-13C	 ISO 198/022 TR-14C	 ISO 199/018 TR-26C
 ISO 197/018 TR-62C	 ISO 160/016 TC-11C	 ISO 257/028 FO-25C	 ISO 257/021 FO-28C	 ISO 257/018 FO-30C	 ISO 257/018 FO-32C	 ISO 190/018 FO-54C	 ISO 111/012 SF-11C	 ISO 111/014 SF-12C	 ISO 111/016 SF-13C	 ISO 110/014 SF-21C



A1 CARTRIDGE



RVG SENSOR POSITIONER



SU CARTRIDGE



A2 CARTRIDGE



CERAMIC BEARINGS



Estd. Since 1982
Making millions smile....

Add: 114/1 "Sai Kripa" 7, Civil Lines, P.O. Box-37, Roorkee,
 Haridwar, Uttarakhand- 247667 (India)

Email : pyrax.polymars123@gmail.com, intellodentindia@gmail.com

Contact : +91 94120 70794, +91 95688 89797

Visit Us : www.pyraxpolymars.in

Follow us on - [!\[\]\(ec9132f1d27c8919987d92907322654d_img.jpg\)](#) [!\[\]\(9db1a20e6fdae9c15975d240125424df_img.jpg\)](#)

